

# ACRYLIC



Quality-  
Products



Your **expert** for **bonding** and **sealing**



# ACRYLIC

Type	Density	Shore A hardness	Acc. total deformation	Skin formation time
<b>EGOCRYL 500</b> UNIVERSAL ACRYLIC	approx. 1.5 g/cm <sup>3</sup>	approx. 15	25.0 % *	approx. 15 minutes
<b>EGOCRYL 530</b> PAINTER'S ACRYLIC	approx. 1.6 g/cm <sup>3</sup>	approx. 15	12.5 %	approx. 15 – 30 minutes
<b>EGOCRYL 560</b> STRUCTURAL ACRYLIC	approx. 1.9 g/cm <sup>3</sup>	approx. 35	7.5 %	approx. 5 minutes
<b>EGOPLAST FK</b> FOIL ADHESIVE	approx. 1.0 g/cm <sup>3</sup>	-	-	approx. 30 min

\* Manufactured as per ISO 9046

	Product type		Spec. application cases					Tests			
	Acrylate dispersion sealant	Acrylate dispersion adhesive	Outdoor application	Indoor application	Connection and expansion joints	Surface structuring	Joint sealant for parquet flooring	CE marking	EMICODE EC 1 Plus	LEED®-credit EQ c4.1	IVD quality label
EGOCRYL 500	✓		✓	✓	✓			✓		✓	✓
EGOCRYL 530	✓		✓	✓	✓			✓	✓	✓	✓
EGOCRYL 560	✓			✓		✓		✓			
EGOPLAST FK		✓	✓	✓					✓	✓	

## EGOCRYL 500

## UNIVERSAL ACRYLIC



## Areas of application

Masonry, timber, parquet, laminate

## Characteristics



## Certificates



No. 8; 9; 12; 16; 19-2; 20;  
22; 24; 29; 31; 35



DIN EN ISO 11600 F 12,5 E  
DIN EN 15651-1 F 12,5 E EXT-INT



	310 ml Cartridge	600 ml Foil bag
white	391141000	391371000
grey	391147000 *	391377000 *
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOCRYL 500 is a ready-to-use, single-component, plastic-elastic, physically drying acrylate dispersion sealant with 25% permitted total deformation (manufactured according to ISO 9046). For sealing of indoor/outdoor connection joints and expansion joints under moderate tensional stress without permanent humidity loads. Good adhesion on all absorbent substrates, such as concrete, porous concrete, fibre cement, plaster, gypsum plaster boards, lime sandstone, brickwork, blank and anodised aluminium, hard PVC and timber.

Excellently suitable for jointing of window, door and ceiling connections, plastic tubes, lightweight construction walls, roller shutter boxes and repair of cracks.

## EGOCRYL 530

## PAINTER'S ACRYLIC



## Areas of application

Masonry, timber, parquet, laminate

## Characteristics



## Certificates



No. 9; 12; 16; 19-2; 20;  
22; 24; 29; 31; 35



DIN EN ISO 11600 F 12,5 P  
DIN EN 15651-1 F 12,5 P EXT-INT



	310 ml Cartridge	600 ml Foil bag
white	392141000	392371000
grey	392147000 *	392377000
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOCRYL 530 is a ready-to-use, single-component, malleable, physically drying acrylate dispersion sealant according to DIN EN ISO 11600 F 12.5 P. Sealing of indoor and outdoor joints and connection joints under low tensile stresses and humidity loads. EGOCRYL 530 is especially suited for smoothing of unevenness, closing of cracks and joints that are intended to be plastered, painted or wallpapered. Good adhesion on all absorbent substrates, such as concrete, porous concrete, fibre cement, plaster, gypsum plaster boards and timber.

EGOCRYL 530 is not suitable for processing in building construction joints according to DIN 18540.

# ACRYLIC

 0 742832 835299	310 ml Cartridge
white	398141000
(pcs./box) / (boxes/pal.)	20 pcs./60 box

EGOCRYL 560 is a high-quality, single-component, physically drying joint sealant on the basis of acrylic dispersion with a decorative grain texture. This product is almost odorless, can be overpainted and is not corrosive to metals. For sealing of cracks in plaster and masonry as well as decorative closing of joints between plaster and skirting boards, concrete, masonry, aerated concrete, painted/varnished timber, anodised aluminium, hard PVC, etc.

## EGOCRYL 560

## STRUCTURAL ACRYLIC

### Areas of application

Masonry, timber, parquet, laminate

### Characteristics



### Certificates



## EGOPLAST FK

## FOLIENKLEBSTOFF

## Areas of application

Foil

## Characteristics



## Certificates



No. 9; 19-2; 35



	310 ml Cartridge	600 ml Foil bag
yellow	397143600	397373600 *
black	397148000	397378000*
(pcs./box) / (boxes/pal.)	20 pcs./60 box	20 pcs./30 boxes

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOPLAST FK is a solvent-free, ready-to-use, permanently malleable, odourless, humidity-resistant, thixotrope bonding and sealing agent with high initial adhesive force and additional gap-filling and sealing characteristics.

EGOPLAST FK forms a sealing film that is air-, wind- and rain-tight, according to the insulation requirements as per EnEV 2014 and DIN 4108-7. For bonding and sealing of breathable and/or vapour-proof foils and fleece materials made of PP, PE, PVC, EPDM or woven fabrics made of mixed materials on substrates such as concrete, timber, wood fibre boards, metal, plaster, gypsum plaster boards. Particularly suitable for air-tight bonding and fixing of window connection foils and for bonding of housewraps for roofing.





## EGOFÜLL PE

## BACKFILLING

## Areas of application

Backfilling of joints

## Characteristics

according to  
DIN 18540

	Order number	Ø	Length	Delivery form	(m/box)/(boxes/pal.)
grey	603006073	6 mm	100 m	Wrapped bundle	500 m/6 box
grey	603008073	8 mm	100 m	Wrapped bundle	500 m/6 box
grey	603010073	10 mm	100 m	Wrapped bundle	500 m/6 box
grey	603013073	13 mm	100 m	Wrapped bundle	500 m/6 box
grey	603015073	15 mm	100 m	Wrapped bundle	500 m/6 box
grey	603020073	20 mm	50 m	Wrapped bundle	250 m/6 box
grey	603025073	25 mm	50 m	Wrapped bundle	250 m/6 box
grey	603030073	30 mm	25 m	Wrapped bundle	125 m/6 box
grey	603040072 *	40 mm	2 m	Rod	270 m/6 box
grey	603050072 *	50 mm	2 m	Rod	180 m/6 box

\* The marked item numbers are available in deviating minimum purchase quantities.

EGOFÜLL PE is a closed-cell, foamed, weather-resistant and plasticiser-free PE roand profile. It can be pressed in and is not water-absorbent. Excellent resistance to oils, grease, diluted lyes, salt water and washing detergents, as well as aromatic and chlorinated hydrocarbons. For backfilling of connection and construction joints, e.g. for jointing according to DIN 18540 and the like.

## EGOFÜLL PE HOHL

	Order number	Ø	Length	Delivery form	(m/box)/(boxes/pal.)
grey	603015079 *	15 mm	550 m	Wrapped bundle	550 m/12 Kar.
grey	603020079 *	20 mm	350 m	Wrapped bundle	350 m/12 Kar.
grey	603025079 *	25 mm	200 m	Wrapped bundle	200 m/12 Kar.
grey	603030079 *	30 mm	160 m	Wrapped bundle	160 m/12 Kar.

\* The marked item numbers are available in deviating minimum purchase quantities.



# ACCESSORIES

	500 ml Can	3000 ml Metal canister	12000 ml Metal canister
Order number	681260000	681710000	681740000

**EGO CLEANER PRO** (acetone-based) is especially suitable for quick and thorough cleaning and degreasing of glass, tiles, ceramics, metals, etc. Instructions for use: wet the parts to be cleaned and wipe with a clean, undyed linen or cotton cloth. Repeat the cleaning process if necessary. For sensitive surfaces such as certain plastics or painted surfaces, test on an unseen area first and carry out your own test in order to rule out material incompatibility.

	500 ml Can	3000 ml Metal canister	12000 ml Metal canister
Order number	790902260	790902710	790902740

**EGO CLEANER SOFT** (acetone-based) is especially suitable for gentle and thorough cleaning and degreasing of glass, tiles, ceramics, natural stone, synthetic material, lacquered metals, etc. Instructions for use: wet the parts to be cleaned and wipe with a clean, undyed linen or cotton cloth. Repeat the cleaning process if necessary. For sensitive surfaces such as certain plastics or painted surfaces, test on an unseen area first and carry out your own test in order to rule out material incompatibility.

## EGO CLEANER PRO

EGOVIT®100

### Areas of application

Metal, tiles, glass, ceramics

### Characteristics

Ablüfte-  
zeit  
5 min.



## EGO CLEANER SOFT

CONLOC®902

### Areas of application

Metal, ceramics, glass, rubber

### Characteristics

Ablüfte-  
zeit  
5 min.



**WOODEN SMOOTHING SPATULAS**

Item	Format/size	Order number
Wooden smoothing spatula	6 mm	570017000
Wooden smoothing spatula	8 mm	570018000
Wooden smoothing spatula	10 mm	570019000
Wooden smoothing spatula	15 mm	570020000
Wooden smoothing spatula	20 mm	570021000
Wooden smoothing spatula	25 mm	570022000
Wooden smoothing spatula	30 mm	570023000
Wooden smoothing spatula	35 mm	570024000
Wooden smoothing spatula	40 mm	570025000

**SMOOTHINGRUBBER, SMOOTHING MASTER KIT**

Item	Size	Order number
Smoothing master kit	11-17 mm	570014000
Smoothing rubber "Glättfix"	oval	570032000
Smoothing rubber „Glättfix expert“	oval	590015000
Smoothing rubber „square“ PALÜ	square	590002020

## ACCESSORIES

System	Product	Order number	Packaging unit
310 ml Cartridge	FIX 1C NOZZLE STANDARD	022000117	1 pcs
310 ml Cartridge	FIX 1C NOZZLE STANDARD	022000114	10 pcs
310 ml Cartridge	FIX 1C NOZZLE STANDARD	022000112	20 pcs
310 ml Cartridge	FIX 1C LONG NOZZLE	022000111	1 pcs
310 ml Cartridge	FIX 1C CLIP NOZZLE V-SEAM	022000118	1 pcs
310 ml Cartridge	FIX 1C CLIP NOZZLE WHITE	022000123	1 pcs
310 ml Cartridge	FIX 1C CLIP NOZZLE WHITE/RED (LID)	022000192	1 pcs
310 ml Cartridge	FIX 1C NOZZLE WHITE/RED TURNABLE	570000930	1 pcs
310 ml Cartridge	FIX 1C NOZZLE 45° JOINT ANGLE PIECE	570003605	1 pcs
400 & 600 ml Foil bag	FIX 1C FUNNEL NOZZLE WHITE	022000115	1 pcs
400 & 600 ml Foil bag	FIX 1C FUNNEL NOZZLE YELLOW 45° ANGLE	590016000	1 pcs

## ROTATING JOINT NOZZLE


1C



System	Product	Order number
EGOPOXID 10 ml	FIX 2C MIXING PIPE	570000919
EGOPOXID 50 ml	FIX 2C MIXING PIPE	570000901
EGOPOXID 50 ml	FIX 2C MIXING PIPE (FOR CHANGEABLE TIPS)	570000902
EGOPOXID 50 ml	FIX 2C CHANGEABLE TIPS	570000903
EGOPOXID 200 ml	FIX 2C MIXING PIPE	570000906

## MIXING TUBES

2C

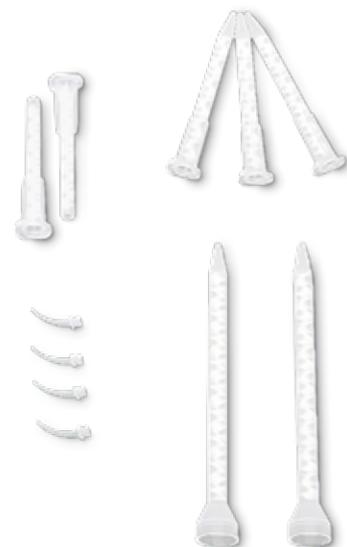

## EGOFIX PROMO

## Characteristics



Sealing devices for sealants	Standard application	Order number
EGOFIX PROMO	310 ml	590036006

The EGOFIX PROMO cartridge gun is excellently suitable for processing of EGO cartridges. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. The powerful pusher simultaneously ensures increased compressive strength of the feed mechanism. The release hook can be easily grabbed and set in position. The EGOFIX PROMO complies with all requirements for a stable and high-quality cartridge gun. The exclusive EGO design is only available from EGO.

## EGOFIX FX

## Characteristics



Sealing devices for sealants	Standard application	Order number
EGOFIX FX 90	310 ml	590036790
EGOFIX FX 40	400 ml	590036740 *
EGOFIX FX 60	600 ml	590036760

\* The marked item numbers are available in deviating minimum purchase quantities. The EGOFIX FX series is excellently suitable for processing of EGO cartridges and foil bags. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. The powerful pusher simultaneously ensures increased compressive strength of the feed mechanism. The release hook can be easily grabbed and set in position. The EGOFIX FX series complies with all requirements for a stable and high-quality sealing device.

# ACCESSORIES

Sealing devices for sealants	Standard application	Order number
EGOFIX EXCEPT 310	310 ml	590036831
EGOFIX EXCEPT 400	400 ml	590036840 *
EGOFIX EXCEPT 600	600 ml	590036860

\* The marked item numbers are available in deviating minimum purchase quantities.

The EGOFIX EXCEPT series is excellently suitable for processing of EGO cartridges and foil bags. The practical rubber-lined handle and the perfectly adjusted trigger ensure ergonomic and comfortable working. It ensures professional jointing thanks to the tailing stop function that can be activated. The sintered pusher block ensures high compressive strength of the feed mechanism. The corrosion-protection special alloy ensures long service life. The release hook can be easily grabbed and set in position. The integrated dosing nozzle blade is a practical feature that helps in cutting the cartridges open during daily work. The improved transmission ratio ensures good pressing of material at low pressure. The EGOFIX EXCEPT series complies with all requirements for a stable and high-quality sealing device.

Sealing devices for sealants		Order number
EGOFIX POWERJET	600 ml	590083860 *
Charger	-	590083866 *
Spare rechargeable battery	-	590083865 *

\* Die gekennzeichneten Artikelnummern sind in abweichenden Mindestabnahmemengen erhältlich.

The EGOFIX POWERJET is excellently suitable for processing of foil bags for professional sealing. The practical rubber-lined handle and the infinitely variable feed trigger ensure comfortable working. The automatic return function ensures professional jointing in transition areas of joints. The integrated LED light ensures good lighting of poorly lit working areas. The optionally available spare rechargeable batteries and chargers ensure professional working and parallel charging of other batteries. Thanks to its outstanding handling features, the EGOFIX POWERJET complies with the highest requirements for battery-operated sealing devices.

## EGOFIX EXCEPT

### Characteristics



## EGOFIX POWERJET

### Characteristics






# FOR THE SAKE OF THE ENVIRONMENT

**Our catalogue on the web**

**[www.ego.de/shop](http://www.ego.de/shop)**

All the items in our catalogue are easy to find in our web shop as well. And the advantage of the web shop: You will find your price and availability of each item.



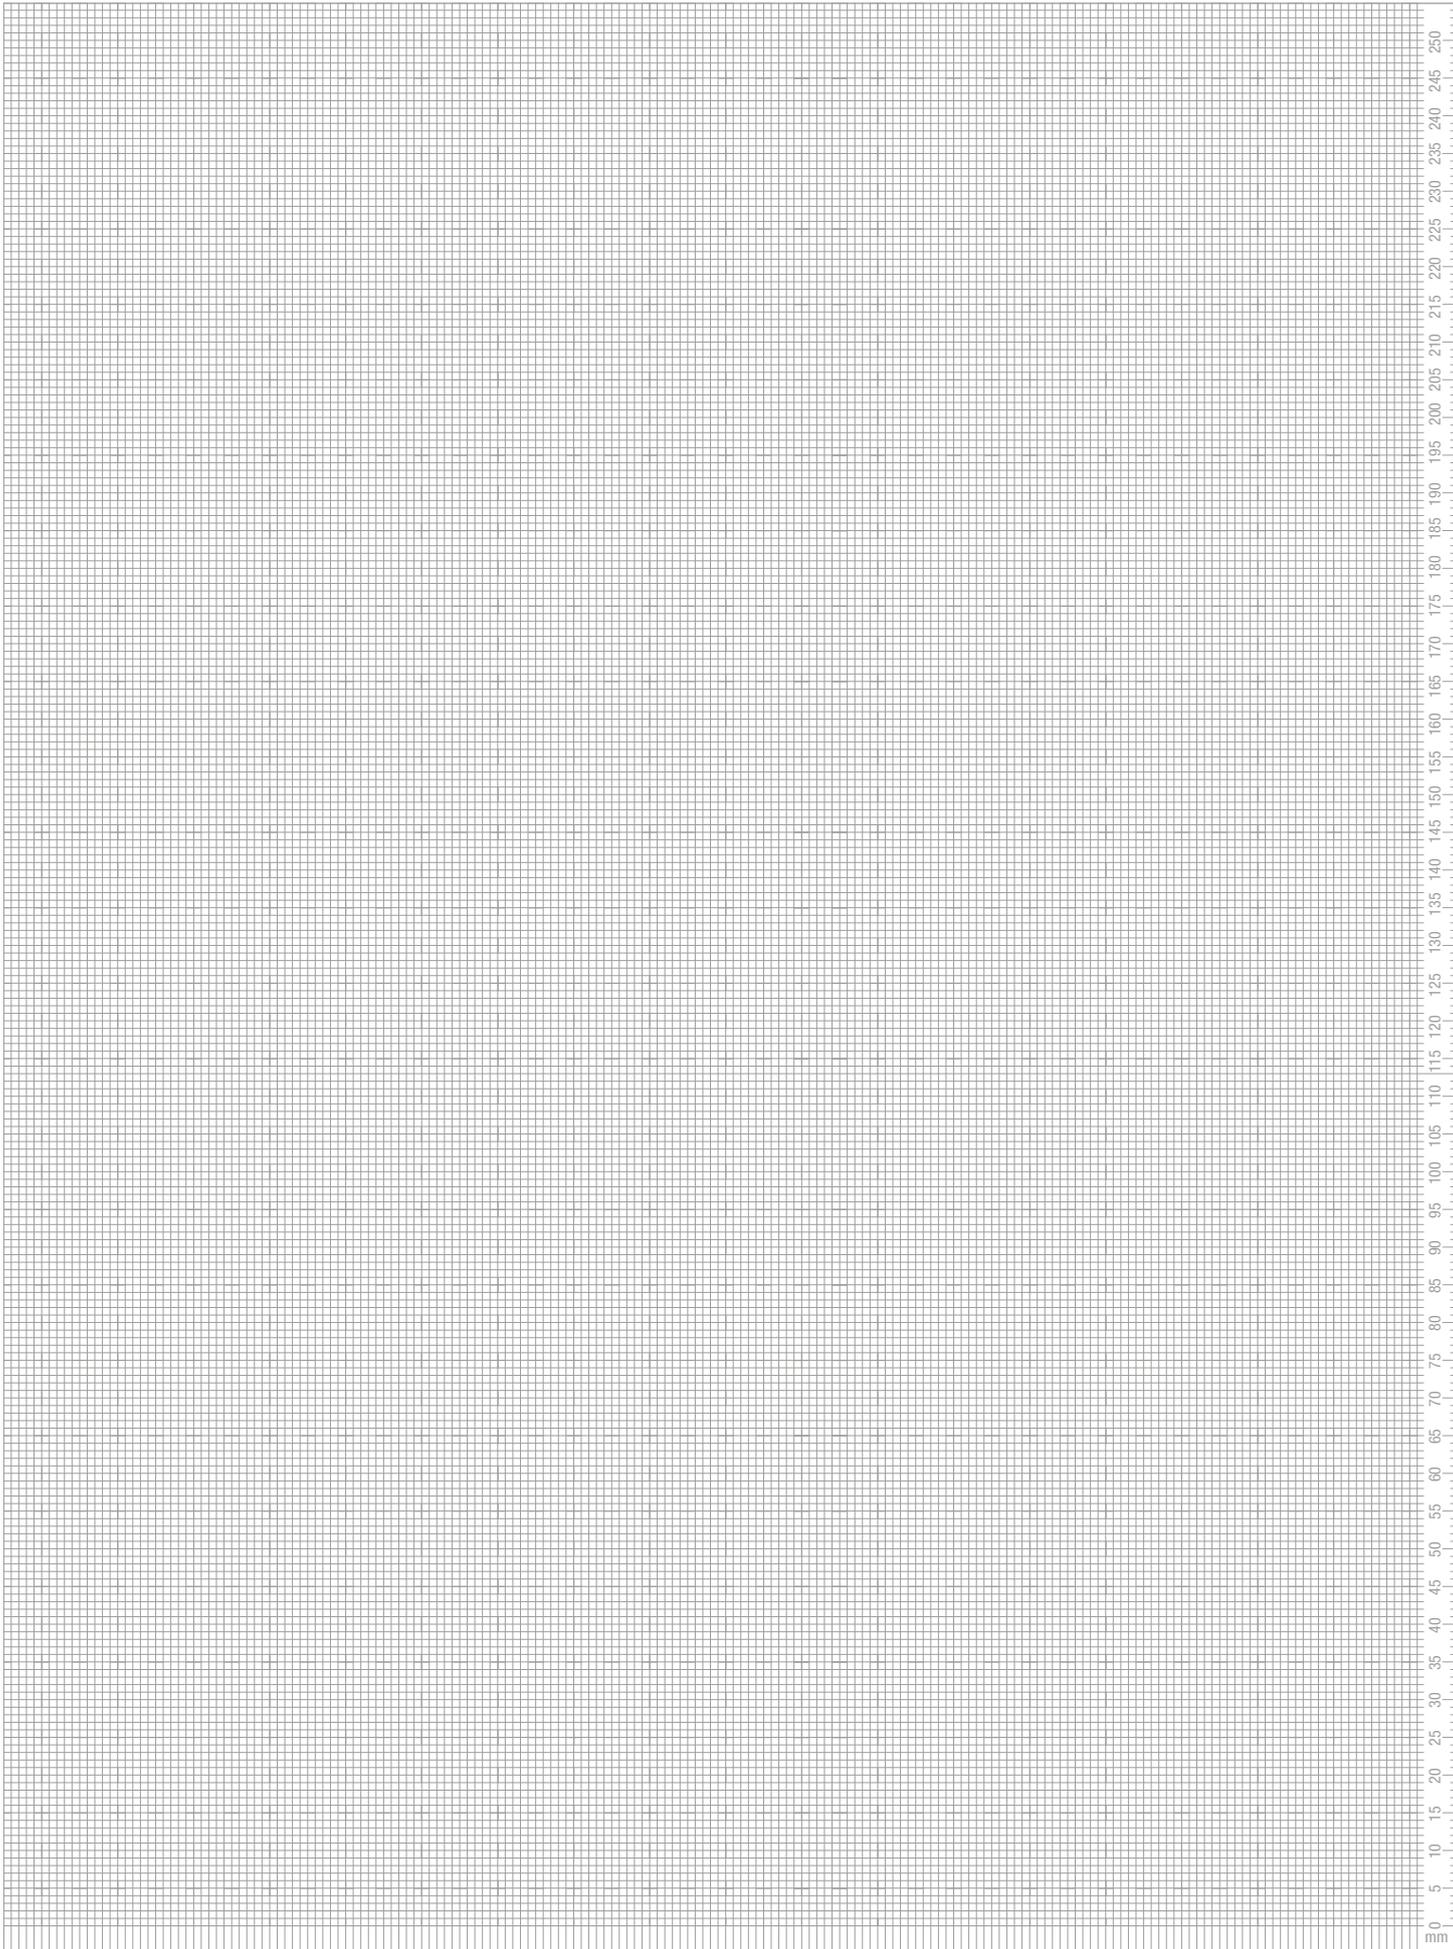


EGO DICHSTOFFWERKE GMBH & CO. BETRIEBS KG

Kaltenbrunn 27 · D-82467 Garmisch-Partenkirchen  
 Fon +49 (0)8821 95 69 0 · Mail info@ego.de



Quality-  
 Products

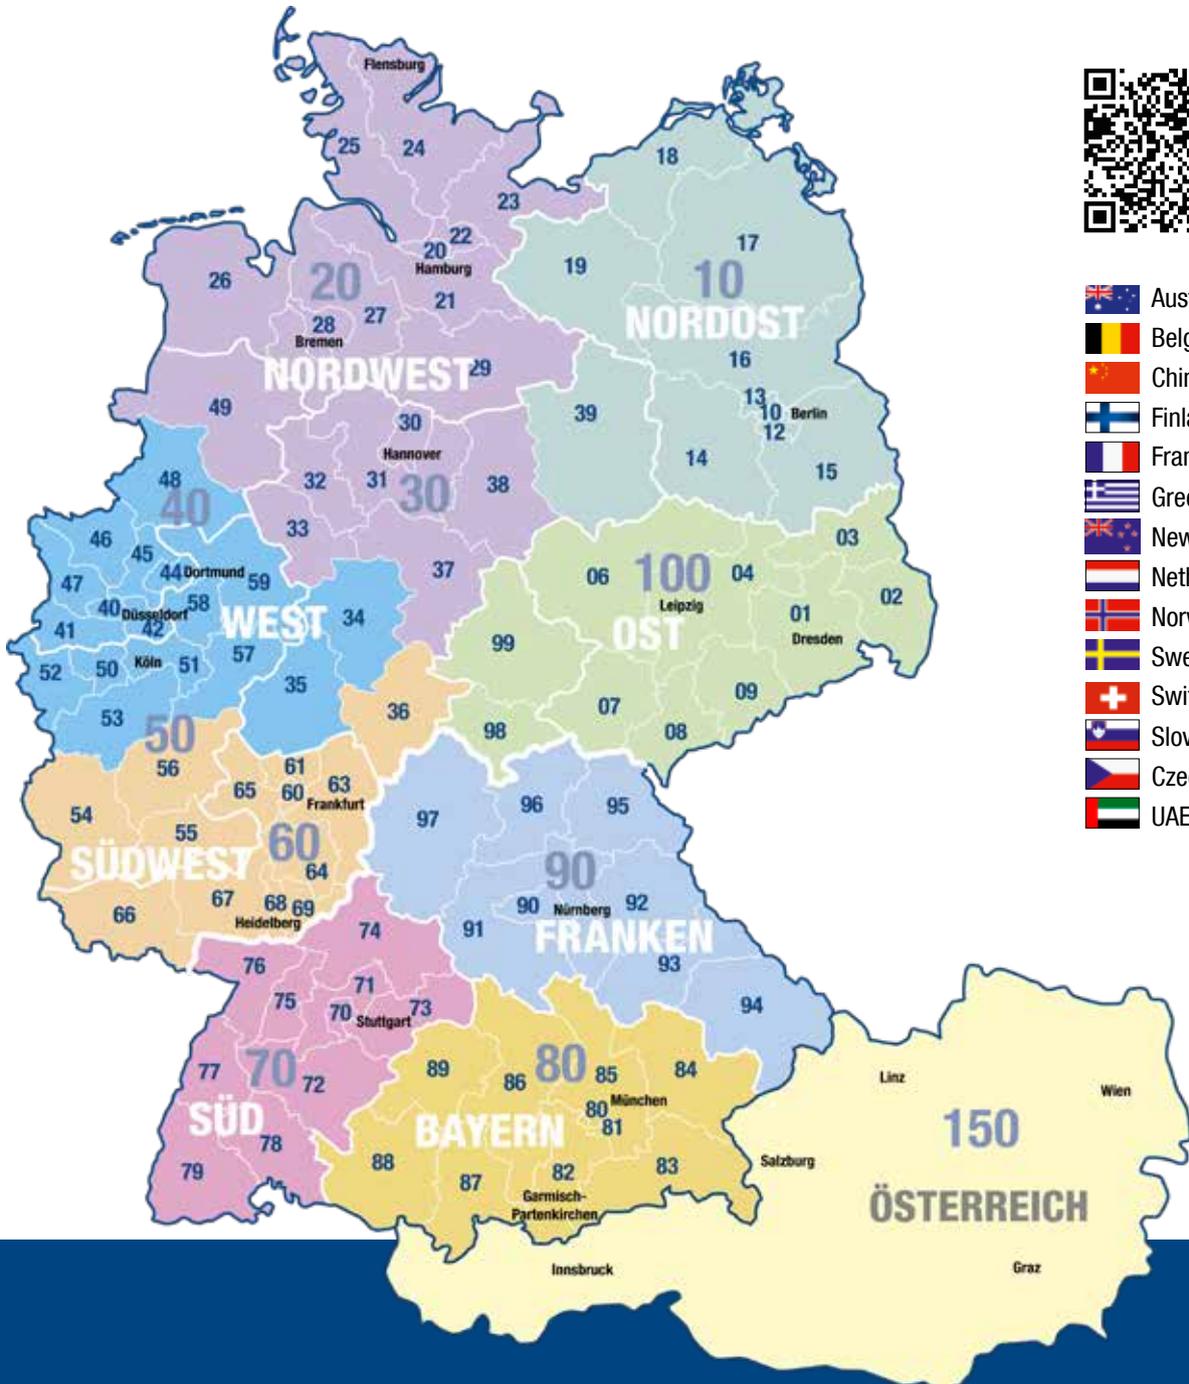

-  Australia
-  Belgium
-  China
-  Finland
-  France
-  Greece
-  New Zealand
-  Netherlands
-  Norway
-  Sweden
-  Switzerland
-  Slovenia
-  Czech Republic
-  UAE

Subject to misprints, technical and sales programme alterations.

Deviations from the original colours are caused by the  
 printing technology used. Edition 01/2023

www.ego.de



Mitglied im Bundesinnungsverband  
 des Glaserhandwerks  
 Mitglied im Industrieverband  
 Dichtstoffe e.V.  
 Mitglied des Instituts für  
 Fenstertechnik e.V. Rosenheim

