

Product Verification

Sustainability

Self declared according to DGNB Neubau 2018

Product Systems


EGOFERM® MIT VLIES

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOFERM® with fleece is a self-adhesive butyl tape that is stable in volume and laminated with synthetic fleece for reinforcement and limitation of surface adhesion, providing excellent characteristics. For vapour-proof sealing of window connection joints in indoor areas (room side). For covering sealing of chimney flashing, sheet metal butt joints, overlaps, connection joints in canopies, garages and skylights. Air-tightness for glazing of greenhouse constructions and glass structures, proflit, roof glazing, ventilation and sanitary areas. Refurbishment of roof, greenhouse, and shed roof glazing. Sealing of the connections between roof light edge and roofing structure. Sealing of wall, roof, attic and connection structures. Long-lasting adhesion, ageing and weather resistance as well as the typical butyl characteristics for butyl products, such as UV resistance, longevity and odourlessness, make EGOFORM® with fleece stand out for butyl rubber products.

EGOFERM® MIT VLIES fulfills the requirements according to EMICODE EC 1 PLUS.

<https://www.ego.de/produkt/egofermmitvlies>



■ Product Assessment

Environmental Quality (ENV)

Criteria

Product Verification

ENV 1.2 Local environmental impact (Updated on: 05.01.2022)

Quality level 4 of 4

Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

■ Summary

The product contributes to the certification:

- Achieved quality level in DGNB 2018 Criteria ENV 1.2 Local environmental impact for the entire product: Quality level 4 of 4

■ Ecolabels & Product-Assessments

AgBB tested



ISO 9001 - Quality Management System



EMICODE EC1plus



French VOC-Label A+



ISO 14001 - Environmental Management System



■ Product Properties

Manufacturer:

| | |
|--|--------------------------|
| Environmental Management System according ISO 14001: | Yes |
| Are reverse logistics in place for the product? | No |
| Final manufacturing location of the product: latitude | 47.49083416185814 ° DDD |
| Final manufacturing location of the product: longitude | 11.178709029541075 ° DDD |

Ingredients:

| | |
|---|---------|
| SVHC according REACH < 0,1 %: | Yes |
| Percentage of the product's composition, that is known to the chemical ingredient level | 100 wt% |
| Recycled content post-consumer: | N/A |
| Recycled content pre-consumer: | N/A |
| Free (< 0,1 %) of polybrominated diphenyl ethers (= PBDE): | Yes |
| Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, MCCP, LCCP): | Yes |
| VOC content according 2004/42/EG: | 0 g/l |
| Content of VOC: | 0 % |
| To what level of detail is the product composition known? | 100 ppm |
| Rapidly renewable content | N/A |
| VOC content according 2004/42/EG: | 0 g/m2 |
| Non renewable virgin raw material content | N/A |

| | |
|---|-----|
| Free (< 0,1 %) of biocidal: | Yes |
| Free (< 0,1 %) of polybrominated biphenyls (= PBB): | Yes |
| Free (< 0,1 %) of hexabromocyclododecane (= HBCD): | Yes |
| Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP): | Yes |
| Free (< 0,1 %) of lead: | Yes |
| Free (< 0,1 %) of cadmium: | Yes |
| Free (< 0,1 %) of chromium-VI compounds: | Yes |
| Free of solvent according to VdL-RL01: | Yes |
| Free (< 0,1 %) of aromatic compounds: | Yes |
| Free (< 0,1 %) from halogenated propellants: | Yes |
| Free (< 0,1 %) of tin: | Yes |
| Free (< 0,1 %) of halogenated flame retardants: | Yes |
| Content of solvents: | 0 % |
| Free (< 0,1 %) of halogens: | Yes |
| Free of plasticizer according to VdL-RL01: | Yes |
| Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: | Yes |

Emissions:

| | |
|---|-------------------------|
| Formaldehyde emissions after 28 days according DIN EN 717-1: | 0,002 mg/m ³ |
| R-Value according to AgBB: | 0,0 |
| TVOC after 28 days according ISO 16000-3 / AgBB: | 0,005 mg/m ³ |
| SVOC after 3 days according ISO 16000-3 / AgBB: | N/A |
| SVOC after 28 days according ISO 16000-3 / AgBB: | N/A |
| TVOC after 3 days according ISO 16000-3 / AgBB: | 0,02 mg/m ³ |
| Carcinogens 1A and 1B after 3 days according ISO-16000 / AgBB: | 0,001 mg/m ³ |
| Carcinogens 1A and 1B after 28 days according ISO-16000 / AgBB: | 0,001 mg/m ³ |

Circularity:

| | |
|--|----|
| Is the product designed for a recycling of equal quality? | No |
| Was the product designed for biodegradation? | No |
| Was the product designed for clean incineration? | No |
| Was the Product designed for emission or direct dispersal? | No |
| Has the product been designed for reuse, refurbishment or remanufacturing? | No |

Life Cycle Assessment:

Functional use period

N/A


System description

The DGNB certification system was founded by the "German Sustainable Building Council" and first appeared on the market in 2008. The DGNB system evaluates buildings holistically on the basis of individual criteria within the categories Ecological Quality, Economic Quality, Sociocultural and Functional Quality, Technical Quality, Process Quality and Location Quality. Different profiles allow the certification of new buildings and existing buildings, as well as of quarters in Germany and Internationally. Buildings can achieve a certification in Bronze, Silver, Gold and Platinum. Up to now, more than 3,500 projects have been awarded by the DGNB (as of June 2018).

Source: www.dgnb.de

System categories

Category Weighting

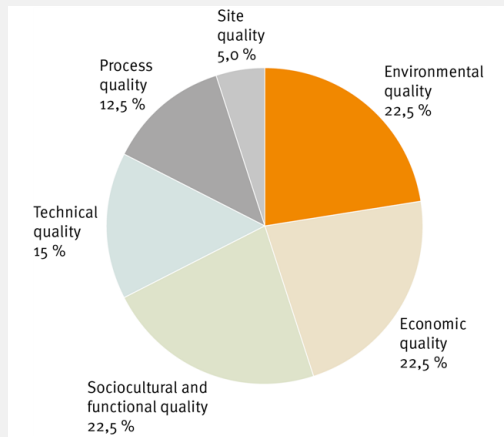

Source: DGNB 2018

Category

Category considered in product verification

| | |
|--|-----|
| Environmental quality (ENV) | Yes |
| Economic quality (ECO) | No |
| Sociocultural and functional quality (SOC) | No |
| Technical quality (TEC) | No |
| Process quality (PRO) | Yes |
| Site quality (SITE) | No |

Detailed Verification

Self declared according to DGNB Neubau 2018

■ Environmental Quality (ENV)

■ ENV 1.2 Local environmental impact (Updated on: 05.01.2022)

Achieved quality level in DGNB 2018 Criteria ENV 1.2 Local environmental impact for the entire product:

| | |
|--------------------|----------------------|
| EGOFERM® MIT VLIES | Quality level 4 of 4 |
|--------------------|----------------------|

Achieved quality level in DGNB 2018 Criterion ENV 1.2 Local environmental impact:

| | |
|--------------------|-----------------|
| EGOFERM® MIT VLIES | Quality level 4 |
|--------------------|-----------------|

Row 13: Assembly adhesives and sealants on the facade, windows and exterior doors (provided by the customer). - Adhesive for the production of airtightness on the facade inside and outside: e.g. PU, PU hybrid, MS polymer, SMP or similar.

Achieved quality level in DGNB 2018 ENV 1.2 Row 13 for the entire product:

| | |
|--------------------|-----------------|
| EGOFERM® MIT VLIES | Quality level 4 |
|--------------------|-----------------|

Achieved quality level in DGNB 2018 ENV 1.2 Row 13:

| | |
|--------------------|-----------------|
| EGOFERM® MIT VLIES | Quality level 4 |
|--------------------|-----------------|

Adhesives and sealants (PU, PU hybrid, MS polymer, SMP or the like) - on the façade, windows and external doors (DGNB ENV1.2 Row 13):

| | |
|--------------------|-----|
| EGOFERM® MIT VLIES | Yes |
|--------------------|-----|

Free of chlorinated paraffins (CP):

| | |
|--------------------|-----|
| EGOFERM® MIT VLIES | Yes |
|--------------------|-----|

Content of VOC < 1 %:

| | |
|--------------------|-----|
| EGOFERM® MIT VLIES | Yes |
|--------------------|-----|

Content of VOC:

| | |
|--------------------|-----|
| EGOFERM® MIT VLIES | 0 % |
|--------------------|-----|

Content of halogenated propellants < 0,1 %:

| | |
|--------------------|-----|
| EGOFERM® MIT VLIES | Yes |
|--------------------|-----|

Certified with EMICODE EC1/EC1PLUS, EC1-R/EC1PLUS-R:

| | |
|--------------------|-----|
| EGOFERM® MIT VLIES | Yes |
|--------------------|-----|

Certified EMICODE standard:

| | |
|--------------------|-----------------|
| EGOFERM® MIT VLIES | EMICODE EC1PLUS |
|--------------------|-----------------|

Certified with Indoor Air Comfort Gold:

| | |
|--------------------|----|
| EGOFERM® MIT VLIES | No |
|--------------------|----|

■ Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27
82467 Garmisch-Partenkirchen
DE
<http://www.ego.de/>



■ Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2018 (New construction building). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.