

# **Product Verification**

# Sustainability

Self declared according to DGNB Neubau 2018

Product Systems

### **EGOSILICON 333**

### EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOSILICONE 333 is a neutral, ready-to-use, high-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product. The product is free of 2 methylkethyl ketone oximes (MEKO) and methylisobuthyl ketone oximes (MIBKO). - extreme adhesion power - high mechanic strength - stable - tested as per ift regulation DI-o1/1 and DI-o2/1 - fast complete vulcanisation - tack-free after the shortest time - good processing quality For modern glass architecture and weather-resistant sealing of silicone-bonded outdoor facades (two-sided structural glazing), for conservatories and roof glazing. For sealing of silicone-bonded insulating glass and VSG.
EGOSILICONE 333 fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egosilicon333







# Environmental Quality (ENV) Criteria Product Verification ENV 1.1 Building life cycle assessment (Updated on: 16.07.2018) EPD available: Yes ENV 1.2 Local environmental impact (Updated on: 05.01.2022) Quality level 4 of 4 Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

### Summary

### The product contributes to the certification:

- The product has an Environmental Product Declaration (EPD) which can be used to calculate the building life cycle assessment: EPD available: Yes
- Achieved quality level in DGNB 2018 Criteria ENV 1.2 Local environmental impact for the entire product: Quality level 4 of 4



### Ecolabels & Product-Assessments

AgBB tested



French VOC-Label A+

ISO 14001 - Environmental Management System





ISO 9001 - Quality Management System





SCAQMD 1168

EMICODE EC1plus

### Product Properties

### Manufacturer:

Environmental Management System according ISO 14001: Yes

Final manufacturing location of the product: latitude 47.49054076514584 ° DDD Final manufacturing location of the product: longitude 11.177829263566535 ° DDD

Are reverse logistics in place for the product?

### Ingredients:

Recycled content post-consumer: N/A Recycled content pre-consumer: N/A Free (< 0,1 %) of polybrominated diphenyl ethers (= Yes PBDE): Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, Yes MCCP, LCCP): Free (< 0,1 %) of biocidal: Yes VOC content according 2004/42/EG: o g/l Content of solvents: 0 % Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: Yes Content of VOC: 0 % VOC content according 2004/42/EG: o g/m2 Percentage of the product's composition, that is known to 100 wt%

To what level of detail is the product composition known?  $\,$  100 ppm  $\,$ 

the chemical ingredient level



Rapidly renewable content	N/A
Non renewable virgin raw material content	N/A
SVHC according REACH < 0,1 %:	Yes
Free (< 0,1 %) of polybrominated biphenyls (= PBB):	Yes
Free (< 0,1 %) of hexabromocyclododecane (= HBCD):	Yes
Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP):	Yes
Free (< 0,1 %) of lead:	Yes
Free (< 0,1 %) of cadmium:	Yes
Free (< 0,1 %) of chromium-VI compounds:	Yes
Free of solvent according to VdL-RLo1:	Yes
Free (< 0,1 %) of aromatic compounds:	Yes
Free (< 0,1 %) from halogenated propellants:	Yes
Free (< 0,1 %) of halogenated flame retardants:	Yes
Free (< 0,1 %) of halogens:	Yes
Free of plasticizer according to VdL-RLo1:	Yes

### **Emissions:**

Formaldehyde emissions after 28 days according DIN EN 0.002 mg/m³ 717-1: R-Value according to AgBB: 0,00 TVOC after 3 days according ISO 16000-3 / AgBB: 0,48 mg/m<sup>3</sup> TVOC after 28 days according ISO 16000-3 / AgBB: 0,016 mg/m<sup>3</sup> SVOC after 3 days according ISO 16000-3 / AgBB: N/A SVOC after 28 days according ISO 16000-3 / AgBB: 0,005 mg/m<sup>3</sup> Carcinogens 1A and 1B after 3 days according ISO-16000 0,001 mg/m<sup>3</sup> / AgBB: Carcinogens 1A and 1B after 28 days according ISO-16000 0.001 mg/m³ / AgBB:

### Life Cycle Assessment:

Functional use period N/A


### Circularity:



### System description

The DGNB certification system was founded by the "German Sustainable Building Council" and first appeared on the market in 2008. The DGNB system evaluates buildings holistically on the basis of individual criteria within the categories Ecological Quality, Economic Quality, Sociocultural and Functional Quality, Technical Quality, Process Quality and Location Quality. Different profiles allow the certification of new buildings and existing buildings, as well as of quarters in Germany and Internationally. Buildings can achieve a certification in Bronze, Silver, Gold and Platinum. Up to now, more than 3,500 projects have been awarded by the DGNB (as of June 2018).

Source: www.dgnb.de

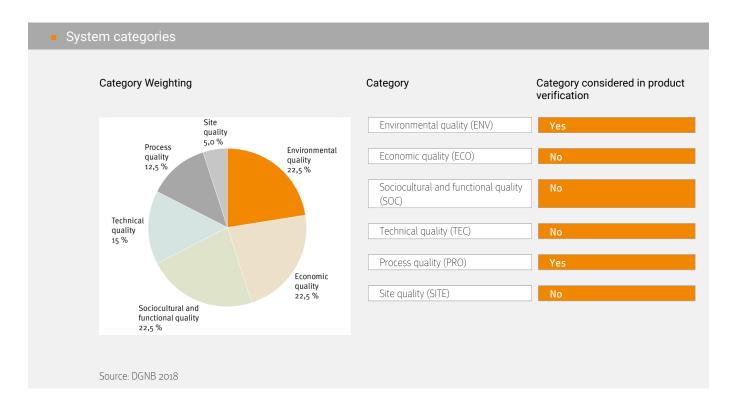



# **Detailed Verification**

Self declared according to DGNB Neubau 2018

Environmental Quality (ENV)

ENV 1.1 Building life cycle assessment (Updated on: 16.07.2018)

The product has an Environmental Product Declaration (EPD) which can be used to calculate the building life cycle assessment:

**EGOSILICON 333** EPD available: Yes An environmental product declaration exists for the product: **EGOSILICON 333** Yes EPD Owner of the Declaration: **EGOSILICON 333** DBC, EFCC, FEICA, IVK EPD Publisher: **EGOSILICON 333** Institut Bauen und Umwelt e.V. (IBU) EPD Programme holder: **EGOSILICON 333** Institut Bauen und Umwelt e.V. (IBU) EPD Declaration number: EPD-DBC-20220179-IBF1-EN **EGOSILICON 333** EPD Issue date: **EGOSILICON 333** 31.08.2022

ENV 1.2 Local environmental impact (Updated on: 05.01.2022

Achieved quality level in DGNB 2018 Criteria ENV 1.2 Local environmental impact for the entire product:

EGOSILICON 333 Quality level 4 of 4

Achieved quality level in DGNB 2018 Criterion ENV 1.2 Local environmental impact:

EGOSILICON 333 Quality level 4

30.08.2027

EPD valid to:

**EGOSILICON 333** 



Row 13: Assembly adhesives and sealants on the facade, windows and exterior doors (provided by the customer). - Adhesive for the production of airtightness on the facade inside and outside: e.g. PU, PU hybrid, MS polymer, SMP or similar.

Achieved quality level in DGNB 2018 ENV 1.2 Row 13 for the entire product:

EGOSILICON 333	Quality level 4
Achieved quality level in DGNB 2018 ENV 1.2 Row 13:	
EGOSILICON 333	Quality level 4
Adhesives and sealants (PU, PU hybrid, MS polymer, SMP or the (DGNB ENV1.2 Row 13):	
EGOSILICON 333	Yes
Free of chlorinated paraffins (CP):	
EGOSILICON 333	Yes
Content of VOC < 1 %:	
EGOSILICON 333	Yes
Content of VOC:	
EGOSILICON 333	0 %
Content of halogenated propellants < 0,1 %:	
EGOSILICON 333	Yes
Certified with EMICODE EC1/EC1PLUS, EC1-R/EC1PLUS-R:	
EGOSILICON 333	Yes
Certified EMICODE standard:	
EGOSILICON 333	EMICODE EC1PLUS
Certified with Indoor Air Comfort Gold:	
EGOSILICON 333	No



### Contact Details Manufacturer

### EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE



### Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2018 (New construction building). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.