

# **Product Verification**

# Sustainability

Self declared according to LEED Building Design and Construction V4 (2015)

Product Systems

#### **EGOSILICON 333**

#### EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOSILICONE 333 is a neutral, ready-to-use, high-quality single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product. The product is free of 2 methylkethyl ketone oximes (MEKO) and methylisobuthyl ketone oximes (MIBKO). - extreme adhesion power - high mechanic strength - stable - tested as per ift regulation DI-o1/1 and DI-o2/1 - fast complete vulcanisation - tack-free after the shortest time - good processing quality For modern glass architecture and weather-resistant sealing of silicone-bonded outdoor facades (two-sided structural glazing), for conservatories and roof glazing. For sealing of silicone-bonded insulating glass and VSG.
EGOSILICONE 333 fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egosilicon333







# Materials and Resources Criteria **Product Verification** MR Credit Life-Cycle Impact Reduction - Option 4: Whole-Building Life-Cycle EPD available: Yes Assessment MR Credit BPDO - Environmental Product Declaration - Option 1: 50 % weighted value Environmental Product Declaration MR Credit BPDO - Material Ingredients - Option 2: Material Ingredient 100 % weighted value Optimization **Indoor Environmental Quality** Criteria **Product Verification** EQ Credit Low-Emitting Materials (except Healthcare and Schools)

#### Summary

## The product contributes to the certification:

The product has an Environmental Product Declaration (EPD), which can be used to calculate the building life cycle assessment under LEED MR Building Life-Cycle Impact Redcutions - Option 4: Whole-Building Life-Cycle Assessment: EPD available: Yes

Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

- Weighted Product Value on Credit BPDO Environmental Product Declaration Option 1: Environmental Product Declaration: 50
   % weighted value
- Weighted Product Value on Credit BPDO Material Ingredients Option 2: Material Ingredient Optimization: 100 % weighted value
- The entire product contributes toward satisfying EQ Credit: Low-Emitting Materials: Yes



#### Ecolabels & Product-Assessments

AgBB tested



ISO 9001 - Quality Management System



EMICODE EC1plus



SCAQMD 1168



French VOC-Label A+



ISO 14001 - Environmental Management System



Product Properties

## Manufacturer:

Environmental Management System according ISO 14001: Yes

Final manufacturing location of the product: latitude 47.49054076514584 ° DDD Final manufacturing location of the product: longitude 11.177829263566535 ° DDD

Yes

Are reverse logistics in place for the product?

#### Ingredients:

Recycled content post-consumer: N/A Recycled content pre-consumer: N/A Free (< 0,1 %) of polybrominated diphenyl ethers (= Yes

DRNE).

PBDE):

Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP,

MCCP, LCCP):

Free (< 0,1 %) of biocidal:

VOC content according 2004/42/EG: o g/l

Content of solvents: 0 %

Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: Yes

Content of VOC: 0 %

VOC content according 2004/42/EG: 0 g/m2

Percentage of the product's composition, that is known to 100 wt%

the chemical ingredient level

To what level of detail is the product composition known? 100 ppm



Rapidly renewable content N/A Non renewable virgin raw material content N/A SVHC according REACH < 0,1 %: Yes Free (< 0,1 %) of polybrominated biphenyls (= PBB): Yes Free (< 0,1 %) of hexabromocyclododecane (= HBCD): Yes Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP): Yes Free (< 0,1 %) of lead: Yes Free (< 0,1 %) of cadmium: Yes Free (< 0,1 %) of chromium-VI compounds: Yes Free of solvent according to VdL-RLo1: Yes Free (< 0,1 %) of aromatic compounds: Yes Free (< 0,1 %) from halogenated propellants: Yes Free (< 0,1 %) of halogenated flame retardants: Yes Free (< 0,1 %) of halogens: Yes Free of plasticizer according to VdL-RLo1: Yes

#### **Emissions:**

Formaldehyde emissions after 28 days according DIN EN 0.002 mg/m<sup>3</sup> 717-1: R-Value according to AgBB: 0,00 0,48 mg/m<sup>3</sup> TVOC after 3 days according ISO 16000-3 / AgBB: TVOC after 28 days according ISO 16000-3 / AgBB: 0,016 mg/m<sup>3</sup> SVOC after 3 days according ISO 16000-3 / AgBB: N/A SVOC after 28 days according ISO 16000-3 / AgBB: 0,005 mg/m<sup>3</sup> Carcinogens 1A and 1B after 3 days according ISO-16000 0,001 mg/m<sup>3</sup> / AgBB: Carcinogens 1A and 1B after 28 days according ISO-16000 0.001 mg/m<sup>3</sup> / AgBB:

#### Life Cycle Assessment:

Functional use period N/A


## Circularity:



#### System description

This verification is the evaluation and ranking of products in terms of the certification system LEED version 4 (Building Design and Construction). The USGBC (U.S. Green Building Council) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the LEED criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a LEED certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of LEED can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the LEED criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.

Source: www.usgbc.org

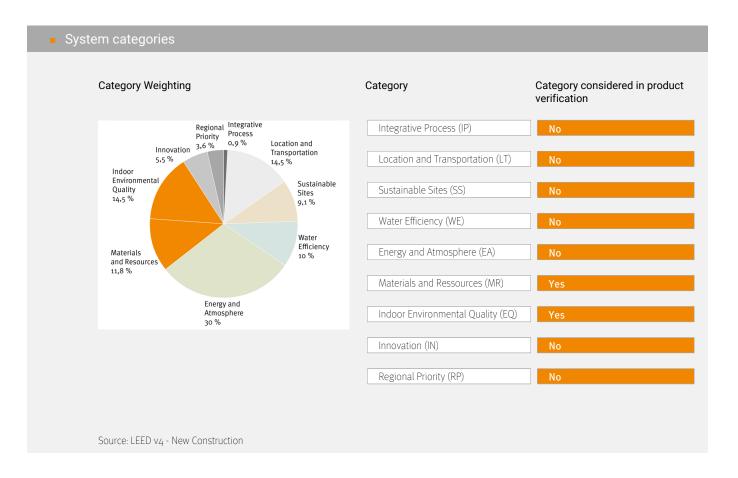



# **Detailed Verification**

Self declared according to LEED Building Design and Construction V4 (2015)

| _ N | latoria | 6 | and | Dacoi | ircac |
|-----|---------|---|-----|-------|-------|

MR Credit Life-Cycle Impact Reduction - Option 4: Whole-Building Life-Cycle Assessmen

The product has an Environmental Product Declaration (EPD), which can be used to calculate the building life cycle assessment under LEED MR Building Life-Cycle Impact Redcutions - Option 4: Whole-Building Life-Cycle

| EGOSILICON 333                                               | EPD available: Yes                   |
|--------------------------------------------------------------|--------------------------------------|
| An environmental product declaration exists for the product: |                                      |
| EGOSILICON 333                                               | Yes                                  |
|                                                              |                                      |
| EPD Owner of the Declaration:                                |                                      |
| EGOSILICON 333                                               | DBC, EFCC, FEICA, IVK                |
|                                                              |                                      |
| EPD Publisher:                                               |                                      |
| EGOSILICON 333                                               | Institut Bauen und Umwelt e.V. (IBU) |
|                                                              |                                      |
| EPD Programme holder:                                        |                                      |
| EGOSILICON 333                                               | Institut Bauen und Umwelt e.V. (IBU) |
|                                                              |                                      |
| EPD Declaration number:                                      |                                      |
| EGOSILICON 333                                               | EPD-DBC-20220179-IBF1-EN             |
|                                                              |                                      |
| EPD Issue date:                                              |                                      |
| EGOSILICON 333                                               | 31.08.2022                           |
|                                                              |                                      |
| EPD valid to:                                                |                                      |
| EGOSILICON 333                                               | 30.08.2027                           |
|                                                              |                                      |

MR Credit BPDO - Environmental Product Declaration - Option 1: Environmental Product Declaration

Weighted Product Value on Credit BPDO - Environmental Product Declaration - Option 1: Environmental Product Declaration:

| EGOSILICON 333 | 50 % weighted value |
|----------------|---------------------|
|----------------|---------------------|

An environmental product declaration exists for the product:

| 7 th chimichian product decidation exists for the product. |     |  |
|------------------------------------------------------------|-----|--|
| EGOSILICON 333                                             | Yes |  |



|   |              | $\neg$ | - | F    |   | _ |
|---|--------------|--------|---|------|---|---|
| - | $\mathbf{P}$ | 1      |   | · \/ | n | Δ |
|   |              |        |   |      |   |   |

| EGOSILICON 333 | Industry-wide (generic) EPD (Type III) conform to |
|----------------|---------------------------------------------------|
|                | ISO 14025, 14040, 14044, and EN 15804 or ISO      |
|                | 21930                                             |

## MR Credit BPDO - Material Ingredients - Option 2: Material Ingredient Optimization

Weighted Product Value on Credit BPDO - Material Ingredients - Option 2: Material Ingredient Optimization:

EGOSILICON 333 100 % weighted value

The product contains no ingredients listed on the REACH Authorization list – Annex XIV, the Restriction list – Annex XVII and the SVHC candidate list. This is proved down to fully inventoried chemical ingredients to 100 ppm (0,01 %):

EGOSILICON 333

The Product have fully inventoried chemical ingredients to 100 ppm and no Benchmark 1 hazard according to GreenScreen v1.2 Benchmark. The product is assessed with "GreenScreen List Translator":

EGOSILICON 333 No

The Product have fully inventoried chemical ingredients to 100 ppm and no Benchmark 1 hazard according to GreenScreen v1.2 Benchmark. The product is assessed with "GreenScreen Assessment":

EGOSILICON 333 No

Certified with Cradle to Cradle:

EGOSILICON 333 No

Cradle to Cradle Standard Version:

EGOSILICON 333 no entry

Cradle to Cradle Level:

EGOSILICON 333 no entry

# Indoor Environmental Quality

#### EQ Credit Low-Emitting Materials (except Healthcare and Schools)

The entire product contributes toward satisfying EQ Credit: Low-Emitting Materials:

EGOSILICON 333

The product contributes toward satisfying EQ Credit 4: Low-Emitting Materials:

EGOSILICON 333 Yes

Interior adhesives and sealants applied on site (including flooring adhesive)

The entire product contributes toward satisfying EQ Credit 4: Low Emitting Materials, Category Adhesives and Sealants:

EGOSILICON 333



The product contributes toward satisfying EQ Credit 4: Low Emitting Materials, Category Adhesives and Sealants: **EGOSILICON 333** Yes The product is an adhesive or sealant: **EGOSILICON 333** Yes The adhesive or sealant is wet applied on the construction site: EGOSILICON 333 Yes The application of the product is inside a building: Yes **EGOSILICON 333** The application of the product is outside of a building: Yes **EGOSILICON 333** VOC product type for adhesives & sealants according to LEED v4/WELL v1: Sealants Architectural **EGOSILICON 333** VOC limit (adhesives & sealants) according to LEED v4/WELL v1 - Limit: **EGOSILICON 333** 250 VOC limit (adhesives & sealants) according to LEED v4/WELL v1 - Unit: **EGOSILICON 333** VOC Limit (adhesives & sealants) according to LEED v4/WELL v1 - Standard: SCAQMD Rule 1168, July 1, 2005) EGOSILICON 333

VOC content of product (less water):

EGOSILICON 333 0 g/l

VOC content of product (less water):

EGOSILICON 333

TVOC after 14 days:

**EGOSILICON** 333  $\leq$  0.016 mg/m<sup>3</sup>

Formaldehyde emissions according DIN EN 717-1:

**EGOSILICON 333** ≤ 0.002 mg/m<sup>3</sup>

Emission testing method according CDPH Standard Method v1.1-2010:

EGOSILICON 333



Emission testing method according AgBB Testing and Evaluation Scheme (2010):

| Emission testing method decording Agab Testing and Evaluation seneme (2010).                                                                                                                             |     |  |  |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|--|--|--|--|
| EGOSILICON 333                                                                                                                                                                                           | Yes |  |  |  |  |
| Emission testing method according ISO 16000-3: 2010, ISO 16000-6: 2011, ISO 16000-9: 2006, ISO 16000-11:2006 either in conjunction with AgBB, or with French legislation on VOC emission class labeling: |     |  |  |  |  |
| EGOSILICON 333                                                                                                                                                                                           | Yes |  |  |  |  |
| Emission testing method according DIBt testing method (2010):                                                                                                                                            |     |  |  |  |  |

| EGOSILICON 333 | No |
|----------------|----|
|----------------|----|



#### Contact Details Manufacturer

#### EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE



#### Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system LEED version 4 (Building Design and Construction). The USGBC (U.S. Green Building Council) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the LEED criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a LEED certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of LEED can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the LEED criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.