

Product Verification

Sustainability

Self declared according to DGNB NBV 2015

Product Systems

EGOTAPE 1000

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOTAPE 1000 is a self-adhesive and malleable butyl sealant tape that is stable in volume. The product is laminated with a highly flexible and transparent PE-film that can be two-dimensionally elongated to up to 300%. The film is primarily intended for application of the tape, sealing is ensured by the butyl. The product corresponds to the requirements of the IVD leaflet no. 5. Long-lasting adhesion, ageing and weather resistance as well as the typical butyl characteristics, such as UV resistance, longevity and odourlessness, make EGOTAPE 1000 and EGOTAPE 2000 stand out for butyl rubber products. EGOTAPE 1000 fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egotape1000







Environmental Quality (ENV) Criteria Product Verification ENV 1.2 Local environmental impact (Updated on: 08.06.2017) Quality level 4 of 4

Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

Summary

The product contributes to the certification:

Achieved quality level in DGNB Criteria ENV 1.2 Local environmental impact for the entire product: Quality level 4 of 4



Ecolabels & Product-Assessments

AgBB tested



EMICODE EC1plus

French VOC-Label A+

ISO 14001 - Environmental Management System









ISO 9001 - Quality Management System



Ingredients:

Percentage of the product's composition, that is known to 100 wt% the chemical ingredient level SVHC according REACH < 0,1 %: Yes VOC content according 2004/42/EG: o g/l VOC content according 2004/42/EG: o g/m2 Recycled content pre-consumer: N/A Recycled content post-consumer: N/A To what level of detail is the product composition known? 100 ppm Rapidly renewable content N/A Non renewable virgin raw material content N/A Free (< 0,1 %) of biocidal: Yes Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, Yes MCCP, LCCP): Free (< 0,1 %) of polybrominated diphenyl ethers (= Yes PBDE): Free (< 0,1 %) of polybrominated biphenyls (= PBB): Yes Free (< 0,1 %) of hexabromocyclododecane (= HBCD): Yes Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP): Yes Free (< 0,1 %) of lead: Yes Free (< 0,1 %) of cadmium: Yes Free (< 0,1 %) of chromium-VI compounds: Yes



Free of solvent according to VdL-RLo1: Yes Free (< 0,1 %) of aromatic compounds: Yes Free (< 0,1 %) from halogenated propellants: Yes Free (< 0,1 %) of tin: Yes Free (< 0,1 %) of halogenated flame retardants: Yes Content of solvents: 0 % Content of VOC: 0 % Free (< 0,1 %) of halogens: Yes Free of plasticizer according to VdL-RLo1: Yes Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: Yes

Manufacturer:

Environmental Management System according ISO 14001: Yes

Final manufacturing location of the product: latitude 47.49021067502303 ° DDD Final manufacturing location of the product: longitude 11.178312060958389 ° DDD

Emissions:

Formaldehyde emissions after 28 days according DIN EN 0.002 mg/m³

717-1:

R-Value according to AgBB: o,o

TVOC after 3 days according ISO 16000-3 / AgBB: 0,02 mg/m³

TVOC after 28 days according ISO 16000-3 / AgBB: 0,005 mg/m³

SVOC after 3 days according ISO 16000-3 / AgBB: N/A

SVOC after 28 days according ISO 16000-3 / AgBB: N/A

Carcinogens 1A and 1B after 3 days according ISO-16000 0,001 mg/m³

/ AgBB:

Carcinogens 1A and 1B after 28 days according ISO-16000 $\,$ 0.001 mg/m³ / AgBB:

, 0

Life Cycle Assessment:

Functional use period N/A

Circularity:

Has the product been designed for reuse, refurbishment No

or remanufacturing?

Is the product designed for a recycling of equal quality?

Was the product designed for clean incineration? No





Was the Product designed for emission or direct dispersal?

No

No


Was the product designed for biodegradation?



System description

The DGNB certification system was founded by the "German Sustainable Building Council" and first appeared on the market in 2008. The DGNB system evaluates buildings holistically on the basis of individual criteria within the categories Ecological Quality, Economic Quality, Sociocultural and Functional Quality, Technical Quality, Process Quality and Location Quality. Different profiles allow the certification of new buildings and existing buildings, as well as of quarters in Germany and Internationally. Buildings can achieve a certification in Bronze, Silver, Gold and Platinum. Up to now, more than 3,500 projects have been awarded by the DGNB (as of June 2018).

Source: www.dgnb.de

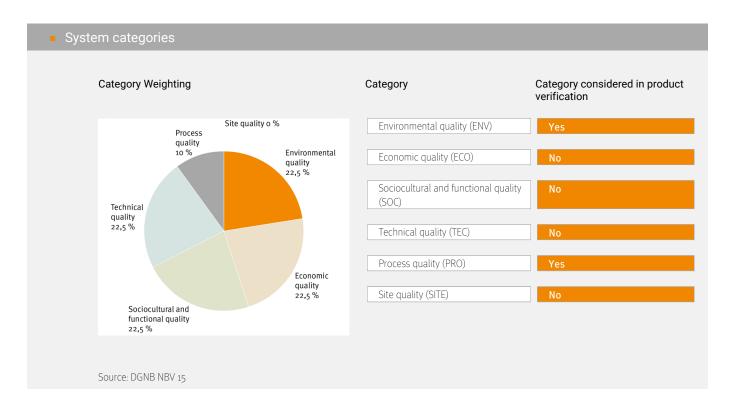



Detailed Verification

Self declared according to DGNB NBV 2015

| | | | | _ | | /END / |
|-------|------|-----|----|------|------|--------|
| H DVI | ronm | ent | al | Dila | litv | (ENV) |
| | | | | | | |

| FNV 1.2 Local environmental impact (Undated on: 08.06) | 20171 |
|----------------------------------------------------------------------------|-------|

| A L C L DO L L | DONID O : | END/401 | | | |
|---------------------------|-----------------|------------------|---------------|----------------|-----------------|
| Achieved quality level in | 1 DGNB Criteria | i EINV T.Z LOCAI | environmental | impact for the | entire broduct: |

EGOTAPE 1000 Quality level 4 of 4

Achieved quality level in DGNB Criterion ENV 1.2 Local environmental impact:

EGOTAPE 1000 Quality level 4

Row 13: Assembly adhesives and sealants on the facade, windows and exterior doors (provided by the customer). - Adhesive for the production of airtightness on the facade inside and outside: e.g. PU, PU hybrid, MS polymer, SMP or similar.

Achieved quality level in DGNB ENV 1.2 Row 13 for the entire product:

EGOTAPE 1000 Quality level 4

Achieved quality level in DGNB ENV 1.2 Row 13:

EGOTAPE 1000 Quality level 4

Adhesives and sealants (PU, PU hybrid, MS polymer, SMP or the like) - on the façade, windows and external doors (DGNB FNV1.2 Row 13):

(DGNB ENV1.2 Row 13):

EGOTAPE 1000 Yes

Free of chlorinated paraffins (CP):

EGOTAPE 1000 Yes

Content of VOC < 1 %:

EGOTAPE 1000 Yes

Content of VOC:

EGOTAPE 1000 0 %

Certified with EMICODE EC1/EC1PLUS, EC1-R/EC1PLUS-R:

EGOTAPE 1000 Yes

Certified EMICODE standard:

EGOTAPE 1000 EMICODE EC1PLUS



Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE



Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2015 (New construction of office buildings). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.