

Product Verification

Sustainability

Self declared according to LEED Building Design and Construction V4 (2015)

Product Systems

EGOTAPE 1000

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOTAPE 1000 is a self-adhesive and malleable butyl sealant tape that is stable in volume. The product is laminated with a highly flexible and transparent PE-film that can be two-dimensionally elongated to up to 300%. The film is primarily intended for application of the tape, sealing is ensured by the butyl. The product corresponds to the requirements of the IVD leaflet no. 5. Long-lasting adhesion, ageing and weather resistance as well as the typical butyl characteristics, such as UV resistance, longevity and odourlessness, make EGOTAPE 1000 and EGOTAPE 2000 stand out for butyl rubber products. EGOTAPE 1000 fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egotape1000







Product Assessment

Materials and Resources

Criteria Product Verification

MR Credit BPDO - Material Ingredients - Option 2: Material Ingredient Optimization

100 % weighted value

 $Legend: yes = Product\ contributes\ toward\ satisfying\ the\ credit,\ N/A = Product\ not\ relevant\ in\ the\ credit,\ no = Credit\ requirements\ are\ not\ proven$

Summary

The product contributes to the certification:

Weighted Product Value on Credit BPDO - Material Ingredients - Option 2: Material Ingredient Optimization: 100 % weighted value



Ecolabels & Product-Assessments

AgBB tested

EMICODE EC1plus

French VOC-Label A+

ISO 14001 - Environmental Management System









ISO 9001 - Quality Management System



Ingredients:

Percentage of the product's composition, that is known to 100 wt% the chemical ingredient level SVHC according REACH < 0,1 %: Yes VOC content according 2004/42/EG: o g/l VOC content according 2004/42/EG: o g/m2 Recycled content pre-consumer: N/A Recycled content post-consumer: N/A To what level of detail is the product composition known? 100 ppm Rapidly renewable content N/A Non renewable virgin raw material content N/A Free (< 0,1 %) of biocidal: Yes Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, Yes MCCP, LCCP): Free (< 0,1 %) of polybrominated diphenyl ethers (= Yes PBDE): Free (< 0,1 %) of polybrominated biphenyls (= PBB): Yes Free (< 0,1 %) of hexabromocyclododecane (= HBCD): Yes Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP): Yes Free (< 0,1 %) of lead: Yes Free (< 0,1 %) of cadmium: Yes Free (< 0,1 %) of chromium-VI compounds: Yes



Free of solvent according to VdL-RLo1: Yes Free (< 0,1 %) of aromatic compounds: Yes Free (< 0,1 %) from halogenated propellants: Yes Free (< 0,1 %) of tin: Yes Free (< 0,1 %) of halogenated flame retardants: Yes Content of solvents: 0 % Content of VOC: 0 % Free (< 0,1 %) of halogens: Yes Free of plasticizer according to VdL-RLo1: Yes Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: Yes

Manufacturer:

Environmental Management System according ISO 14001: Yes

Final manufacturing location of the product: latitude 47.49021067502303 ° DDD Final manufacturing location of the product: longitude 11.178312060958389 ° DDD

Emissions:

Formaldehyde emissions after 28 days according DIN EN 0.002 mg/m³

/1/-1:

R-Value according to AgBB: 0,0

TVOC after 3 days according ISO 16000-3 / AgBB: $0,02 \text{ mg/m}^3$ TVOC after 28 days according ISO 16000-3 / AgBB: $0,005 \text{ mg/m}^3$

SVOC after 3 days according ISO 16000-3 / AgBB: N/A

SVOC after 28 days according ISO 16000-3 / AgBB: N/A

Carcinogens 1A and 1B after 3 days according ISO-16000 o,001 mg/m³ / AgBB:

Carcinogens 1A and 1B after 28 days according ISO-16000 $\,$ 0.001 mg/m³ / AgBB:

Life Cycle Assessment:

Functional use period N/A

Circularity:

Has the product been designed for reuse, refurbishment or remanufacturing?

No

Is the product designed for a recycling of equal quality? No

Was the product designed for clean incineration?



Was the Product designed for emission or direct dispersal?

No

Was the product designed for biodegradation?


No



System description

This verification is the evaluation and ranking of products in terms of the certification system LEED version 4 (Building Design and Construction). The USGBC (U.S. Green Building Council) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the LEED criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a LEED certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of LEED can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the LEED criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.

Source: www.usgbc.org

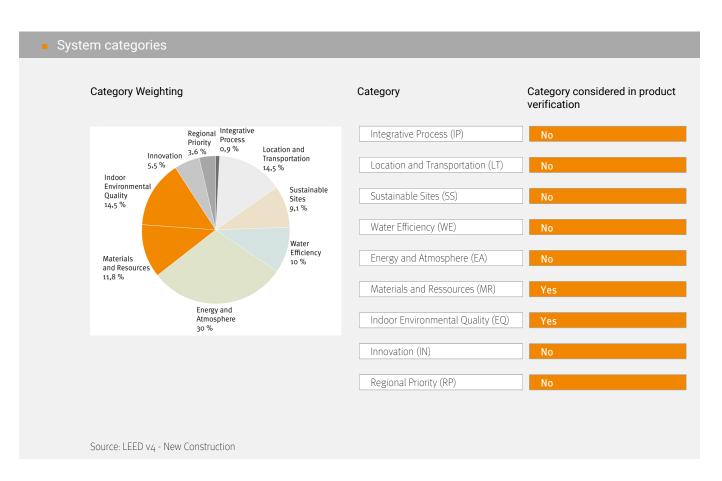



Detailed Verification

Self declared according to LEED Building Design and Construction V4 (2015)

Weighted Product Value on Credit F	DO - Material Ingredients - Option 2: Material Ingredient Optimization:
EGOTAPE 1000	100 % weighted value
	isted on the REACH Authorization list – Annex XIV, the Restriction list – st. This is proved down to fully inventoried chemical ingredients to 100
EGOTAPE 1000	Yes
	emical ingredients to 100 ppm and no Benchmark 1 hazard according to oduct is assessed with "GreenScreen List Translator": No
GreenScreen v1.2 Benchmark. The EGOTAPE 1000 The Product have fully inventoried of	oduct is assessed with "GreenScreen List Translator":
GreenScreen v1.2 Benchmark. The EGOTAPE 1000 The Product have fully inventoried of	oduct is assessed with "GreenScreen List Translator": No emical ingredients to 100 ppm and no Benchmark 1 hazard according to
GreenScreen v1.2 Benchmark. The EGOTAPE 1000 The Product have fully inventoried of GreenScreen v1.2 Benchmark. The	oduct is assessed with "GreenScreen List Translator": No emical ingredients to 100 ppm and no Benchmark 1 hazard according to oduct is assessed with "GreenScreen Assessment":
GreenScreen v1.2 Benchmark. The EGOTAPE 1000 The Product have fully inventoried of GreenScreen v1.2 Benchmark. The EGOTAPE 1000	oduct is assessed with "GreenScreen List Translator": No emical ingredients to 100 ppm and no Benchmark 1 hazard according to oduct is assessed with "GreenScreen Assessment":
GreenScreen v1.2 Benchmark. The EGOTAPE 1000 The Product have fully inventoried of GreenScreen v1.2 Benchmark. The EGOTAPE 1000 Certified with Cradle to Cradle:	emical ingredients to 100 ppm and no Benchmark 1 hazard according to oduct is assessed with "GreenScreen Assessment": No



Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE



Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system LEED version 4 (Building Design and Construction). The USGBC (U.S. Green Building Council) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the LEED criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a LEED certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of LEED can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the LEED criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.