

# **Product Verification**

# Sustainability

Self declared according to BREEAM International New Construction 2016 / V6.0

Product Systems

## EGOTAPE 2000

## EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOTAPE 2000 is a self-adhesive butyl tape that is stable in volume and inseparably laminated with a tear-resistant aluminium foil. This combination produces optimal product characteristics, such as extremely high tightness against water vapour diffusion and radon tightness. EGOTAPE 2000 fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egotape2000







# ### Product Assessment Health and wellbeing Criteria Product Verification Hea 02 Indoor air quality (GN22 V2.0 April 2016) Hea 02 Indoor air quality - Exemplary Level (GN22 V2.0 April 2016) Yes Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

### Summary

# The product contributes to the certification:

- The product contributes toward satisfying Hea o2 Indoor air quality: Yes
- The product contributes toward satisfying Hea o2 Indoor air quality Exemplary Level: Yes



AgBB tested **EMICODE** 



EMICODE EC1plus

French VOC-Label A+





ISO 14001 - Environmental Management System

ISO 9001 - Quality Management System





## Ingredients:

Percentage of the product's composition, that is known to the chemical ingredient level	100 Wt%
SVHC according REACH < 0,1 %:	Yes
VOC content according 2004/42/EG:	o g/l
VOC content according 2004/42/EG:	o g/m2

Recycled content pre-consumer:	N/A
Recycled content post-consumer:	N/A

To what	level	of c	letail	is t	he	prod	uct	compositi	on	known?	100	ppm

Rapidly renewable content	N/A
Non renewable virgin raw material content	N/A
Free (< 0,1 %) of biocidal:	Yes
Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP,	Yes

Yes

Yes

MCCP, LCCP):	
Free (< 0,1 %) of polybrominated diphenyl ethers (= PBDE):	Yes
Free (< 0,1 %) of polybrominated biphenyls (= PBB):	Yes
Free (< 0,1 %) of hexabromocyclododecane (= HBCD):	Yes
Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCE	P): Yes
Free (< 0,1 %) of lead:	Yes
Free (< 0,1 %) of cadmium:	Yes

Free of solvent according to VdL-RL01:

Free (< 0,1 %) of chromium-VI compounds:



Free (< 0,1 %) of aromatic compounds: Yes Free (< 0,1 %) from halogenated propellants: Yes Free (< 0,1 %) of tin: Yes Free (< 0,1 %) of halogenated flame retardants: Yes Content of VOC: 0 % Content of solvents: 0 % Free (< 0,1 %) of halogens: Yes Free of plasticizer according to VdL-RLo1: Yes Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: Yes

### Manufacturer:

Environmental Management System according ISO 14001: Yes

Final manufacturing location of the product: latitude 47.49027592181296 ° DDD Final manufacturing location of the product: longitude 11.177732703797371 ° DDD

Are reverse logistics in place for the product?

### **Emissions:**

Formaldehyde emissions after 28 days according DIN EN 0.002 mg/m³

R-Value according to AgBB: o,o

TVOC after 3 days according ISO 16000-3 / AgBB:  $0,02 \text{ mg/m}^3$  TVOC after 28 days according ISO 16000-3 / AgBB:  $0,005 \text{ mg/m}^3$ 

SVOC after 3 days according ISO 16000-3 / AgBB: N/A
SVOC after 28 days according ISO 16000-3 / AgBB: N/A

Carcinogens 1A and 1B after 3 days according ISO-16000 0,001 mg/m³ / AgBB:

Carcinogens 1A and 1B after 28 days according ISO-16000 0.001 mg/m³ / AgBB:

No

### Life Cycle Assessment:

Functional use period N/A

### Circularity:

Has the product been designed for reuse, refurbishment or remanufacturing?

Is the product designed for a recycling of equal quality? No

Was the product designed for clean incineration? No



Was the Product designed for emission or direct dispersal?

No

No


Was the product designed for biodegradation?



### System description

The BREEAM (Building Research Establishment Environmental Assessment Method) certification system was published by the Building Research Establishment (BRE). It came on the market in 1990 and was one of the first certification systems for buildings. BREEAM offers different standards, which vary in the requirements, depending on the country, type of use and development phase of the project (new construction, in-use, refurbishment and fit-out, infrastructure and communities). Within ten environmental categories and numerous individual credits, buildings are rated and can be rated as Acceptable (for in-use scheme only), Pass, Good, Very Good, Excellent and Outstanding. Up to now, more than 16,300 BREEAM projects have been certified worldwide (as of April 2018).

Source: www.breeam.com

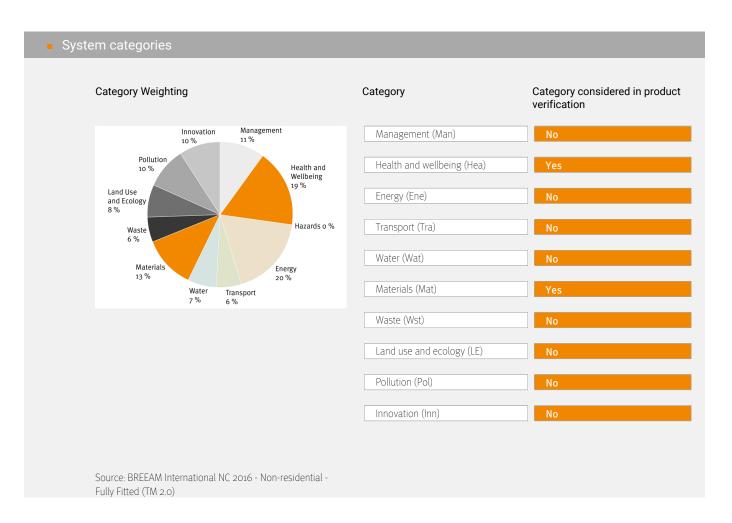



# **Detailed Verification**

Self declared according to BREEAM International New Construction 2016 / V6.0

02 Indoor air quality (GN22 V2.0 Ap	ril 2016)
The product contributes toward satisfyi	ing Hea 02 Indoor air quality:
EGOTAPE 2000	Yes
The product contributes toward satisfyi	ing Hea 02 Indoor air quality:
EGOTAPE 2000	Yes
adhesives):	2 Indoor air quality for interior adhesives and sealants (including
EGOTAPE 2000	Yes
	or air quality for interior adhesives and sealants (including floorn
adhesives):	
EGOTAPE 2000	Yes
,	Yes
EGOTAPE 2000	Yes
EGOTAPE 2000  The product is an adhesive or sealant:	Yes
The product is an adhesive or sealant:  EGOTAPE 2000	Yes
EGOTAPE 2000  The product is an adhesive or sealant:  EGOTAPE 2000  The application of the product is inside	a building:  Yes  Yes
EGOTAPE 2000  The product is an adhesive or sealant:  EGOTAPE 2000  The application of the product is inside  EGOTAPE 2000	a building:  Yes  Yes
EGOTAPE 2000  The product is an adhesive or sealant:  EGOTAPE 2000  The application of the product is inside  EGOTAPE 2000  Formaldehyde after 28 days ≤ 0.06 mg/	a building:  Yes  Yes  Yes  Yes
EGOTAPE 2000  The product is an adhesive or sealant:  EGOTAPE 2000  The application of the product is inside  EGOTAPE 2000  Formaldehyde after 28 days ≤ 0.06 mg/	a building:  Yes  Yes  Yes  Yes
EGOTAPE 2000  The product is an adhesive or sealant:  EGOTAPE 2000  The application of the product is inside  EGOTAPE 2000  Formaldehyde after 28 days ≤ 0.06 mg/  EGOTAPE 2000  Formaldehyde emissions according DIN	a building:  Yes  Yes  Yes  Yes  Yes



Category 1A and 1B carcinogens after 28 days $\leq$ 0.001 mg	/m³:
EGOTAPE 2000	Yes
Carcinogens 1A and 1B after 28 days according ISO-16000	J / AaBB·
EGOTAPE 2000	< 0.001 mg/m <sup>3</sup>
	<i>y</i>
Certified with eco-INSTITUT-Label:	
EGOTAPE 2000	No
Certified with UL Greenguard Gold:	
EGOTAPE 2000	No
Certified with UL Greenguard:	
EGOTAPE 2000	No
GREENGUARD certification confirms that there are no mea	asured carcinogens:
EGOTAPE 2000	No
Certified with Indoor Air Comfort:	
EGOTAPE 2000	No
Certified with Indoor Air Comfort Gold:	
EGOTAPE 2000	No
	110
Certified with M1 Emission Classification of Building Mate	rials:
EGOTAPE 2000	No
Certified EMICODE standard:	5,40005 500010
EGOTAPE 2000	EMICODE EC1PLUS
02 Indoor air quality - Exemplary Level (GN22 V2.0 Ap	pril 2016)
The product contributes toward satisfying Hea 02 Indoor a	air quality - Exemplary Level:
EGOTAPE 2000	Yes
The product contributes toward satisfying Hea 02 Indoor a	air quality - Exemplary Level:
EGOTAPE 2000	Yes
Interior adhesives and sealants (including flooring adhesive	es) - Exemplary Level
The entire product complies with Hea 02 Indoor air quality (including flooring adhesives):	- Exemplary Level for interior adhesives and sealants
FGOTAPE 2000	Yes



The product complies with Hea 02 Indoor air quality - Exemplary Level for interior adhesives and sealants (including flooring adhesives):

`	
EGOTAPE 2000	Yes
The product is an adhesive or sealant:	
EGOTAPE 2000	Yes
The application of the product is inside a building:	
EGOTAPE 2000	Yes
Formaldehyde after 28 days ≤ 0.01 mg/m³:	
EGOTAPE 2000	Yes
Formaldehyde emissions according DIN EN 717-1:	
EGOTAPE 2000	≤ 0.002 mg/m³
TVOC after 28 days ≤ 0.3 mg/m³:	
EGOTAPE 2000	Yes
TVOC after 28 days:	
EGOTAPE 2000	< 0.005 mg/m <sup>3</sup>
TSVOC after 28 days ≤ 0,1 mg/m³:	
EGOTAPE 2000	Yes
2507111 2 2 0 0 0	
TSVOC after 28 days:	
EGOTAPE 2000	< 0.02 mg/m <sup>3</sup>
Category 1A and 1B carcinogens after 28 days ≤ 0.001 mg/m <sup>2</sup>	
EGOTAPE 2000	Yes
Carcinogens 1A and 1B after 28 days according ISO-16000 / A	AqBB:
EGOTAPE 2000	< 0.001 mg/m <sup>3</sup>
Certified with Indoor Air Comfort Gold:	
EGOTAPE 2000	No
0. 15 15 1100 25 1 1 1	
Certified EMICODE standard:	EMICODE EC1PLUS
EGOTAPE 2000	EIVIICODE ECIPLOS



### Contact Details Manufacturer

### EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE



### Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2015 (New construction of office buildings). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.