

Product Verification

Sustainability

Self declared according to BREEAM International New Construction 2016

Product Systems

EGOTAPE 2000

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOTAPE 2000 is a self-adhesive butyl tape that is stable in volume and inseparably laminated with a tear-resistant aluminium foil. This combination produces optimal product characteristics, such as extremely high tightness against water vapour diffusion and radon tightness. EGOTAPE 2000 fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egotape2000







Product Assessment

Health and wellbeing

Criteria	Product Verification
Hea o2 Indoor air quality (GN22 V2.0 April 2016)	Yes
Hea 02 Indoor air quality - Exemplary Level (GN22 V2.0 April 2016)	Yes

Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

Summary

The product contributes to the certification:

- The product contributes toward satisfying Hea 02 Indoor air quality: Yes
- The product contributes toward satisfying Hea 02 Indoor air quality Exemplary Level: Yes



Ecolabels & Product-Assessments



Product Properties

Ingredients:

Percentage of the product's composition, that is known to the chemical ingredient level	100 wt%
SVHC according REACH < 0,1 %:	Yes
VOC content according 2004/42/EG:	o g/l
VOC content according 2004/42/EG:	o g/m2
Recycled content pre-consumer:	N/A
Recycled content post-consumer:	N/A
To what level of detail is the product composition known?	100 ppm
Rapidly renewable content	N/A
Non renewable virgin raw material content	N/A
Free (< 0,1 %) of biocidal:	Yes
Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, MCCP, LCCP):	Yes
Free (< 0,1 %) of polybrominated diphenyl ethers (= PBDE):	Yes
Free (< 0,1 %) of polybrominated biphenyls (= PBB):	Yes
Free (< 0,1 %) of hexabromocyclododecane (= HBCD):	Yes
Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP):	Yes
Free (< 0,1 %) of lead:	Yes
Free (< 0,1 %) of cadmium:	Yes
Free (< 0,1 %) of chromium-VI compounds:	Yes
Free of solvent according to VdL-RLo1:	Yes



Free (< 0,1 %) of aromatic compounds:	Yes
Free (< 0,1 %) from halogenated propellants:	Yes
Free (< 0,1 %) of tin:	Yes
Free (< 0,1 %) of halogenated flame retardants:	Yes
Content of VOC:	0%
Content of solvents:	0%
Free (< 0,1 %) of halogens:	Yes
Free of plasticizer according to VdL-RLo1:	Yes
Free (< 0,1 %) of hydrocarbon (KWS) plasticizer:	Yes

Manufacturer:

Environmental Management System according ISO 14001:	Yes
Final manufacturing location of the product: latitude	47.49027592181296 ° DDD
Final manufacturing location of the product: longitude	11.177732703797371 ° DDD
Are reverse logistics in place for the product?	No

Emissions:

Formaldehyde emissions after 28 days according DIN EN 717-1:	0.002 mg/m³
R-Value according to AgBB:	0,0
TVOC after 3 days according ISO 16000-3 / AgBB:	0,02 mg/m³
TVOC after 28 days according ISO 16000-3 / AgBB:	0,005 mg/m³
SVOC after 3 days according ISO 16000-3 / AgBB:	N/A
SVOC after 28 days according ISO 16000-3 / AgBB:	N/A
Carcinogens 1A and 1B after 3 days according ISO-16000 / AgBB:	0,001 mg/m³
Carcinogens 1A and 1B after 28 days according ISO-16000 / AgBB:	0.001 mg/m³

Life Cycle Assessment:

Functional use period	N/A
Circularity:	
Has the product been designed for reuse, refurbishment or remanufacturing?	No
Is the product designed for a recycling of equal quality?	No
Was the product designed for clean incineration?	No



Was the Product designed for emission or direct	No
dispersal?	
Was the product designed for biodegradation?	No




System description

The BREEAM (Building Research Establishment Environmental Assessment Method) certification system was published by the Building Research Establishment (BRE). It came on the market in 1990 and was one of the first certification systems for buildings. BREEAM offers different standards, which vary in the requirements, depending on the country, type of use and development phase of the project (new construction, in-use, refurbishment and fit-out, infrastructure and communities). Within ten environmental categories and numerous individual credits, buildings are rated and can be rated as Acceptable (for in-use scheme only), Pass, Good, Very Good, Excellent and Outstanding. Up to now, more than 16,300 BREEAM projects have been certified worldwide (as of April 2018).

Source: www.breeam.com

System categories

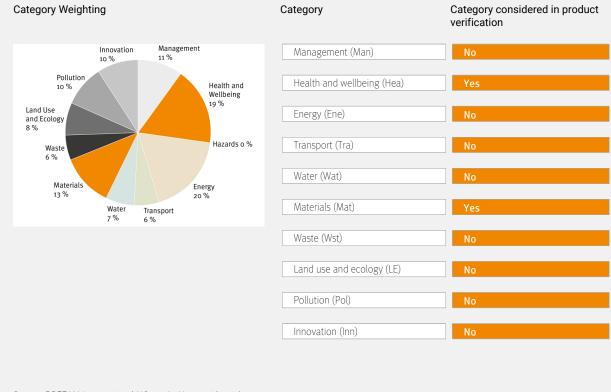

Source: BREEAM International NC 2016 - Non-residential -Fully Fitted (TM 2.0)



Detailed Verification

Self declared according to BREEAM International New Construction 2016

Health and wellbeing

Hea 02 Indoor air quality (GN22 V2.0 April 2016)

The product contributes toward satisfying Hea 02 In	ndoor air quality:
EGOTAPE 2000	Yes
The product contributes toward satisfying Hea 02 Ii	ndoor air quality:
EGOTAPE 2000	Yes
Interior adhesives and sealants (including flooring a	dhesives) quality for interior adhesives and sealants (including floorng
adhesives):	quality for interior adhesives and search (including hooring
EGOTAPE 2000	Yes
The product complies with Hea 02 Indoor air quality adhesives):	v for interior adhesives and sealants (including floorng
EGOTAPE 2000	Yes
The product is an adhesive or sealant: EGOTAPE 2000 The application of the product is inside a building:	Yes
EGOTAPE 2000	Yes
Formaldehyde after 28 days ≤ 0.06 mg/m³:	
EGOTAPE 2000	Yes
Formaldehyde emissions according DIN EN 717-1:	
EGOTAPE 2000	≤ 0.002 mg/m ³
TVOC after 28 days ≤ 1.0 mg/m³: EGOTAPE 2000	Yes
TVOC after 28 days:	
EGOTAPE 2000	< 0.005 mg/m ³



A a D D ·	
AgBB: < 0.001 mg/m ³	
< 0.001 mg/m	
No	
No	
No	
NO	
red carcinogens:	
No	
No	
No	
INO	
ls:	
No	
EMICODE EC1PLUS	
2016)	
quality - Exemplary Level:	
Yes	
quality - Exemplary Level:	
	No EMICODE EC1PLUS C016)

 EGOTAPE 2000
 Yes



EGOTAPE 2000	Yes
The product is an adhesive or sealant:	
EGOTAPE 2000	Yes
The application of the product is inside a building:	
EGOTAPE 2000	Yes
Formaldehyde after 28 days ≤ 0.01 mg/m³:	
EGOTAPE 2000	Yes
Formaldehyde emissions according DIN EN 717-1:	< 0.002 mg/m ³
EGOTAPE 2000	≤ 0.002 mg/m ³
TVOC after 28 days ≤ 0.3 mg/m³:	
EGOTAPE 2000	Yes
TVOC after 28 days:	
EGOTAPE 2000	< 0.005 mg/m ³
TSVOC after 28 days ≤ 0,1 mg/m³:	
EGOTAPE 2000	Yes
TSVOC after 28 days:	
EGOTAPE 2000	< 0.02 mg/m ³
Category 1A and 1B carcinogens after 28 days \leq 0.001 mg/	m³:
EGOTAPE 2000	Yes
Carcinogens 1A and 1B after 28 days according ISO-16000	
EGOTAPE 2000	< 0.001 mg/m ³
L.S. M. L. 2000	· 0.001 mg/m
Certified with Indoor Air Comfort Gold:	
EGOTAPE 2000	No
Certified EMICODE standard:	



Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE http://www.ego.de/



Disclaime

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2015 (New construction of office buildings). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.