

Product Verification

Sustainability

Self declared according to DGNB NBV 2015

Product Systems

EGOSILICON 360

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

EGOSILICONE 360 is a ready-to-use, high-quality, tested single-component silicone sealant that vulcanises through reaction with air humidity to form an elastic end product and is characterised by its high abrasion-resistance. The product is coloured and fungicidal. EGOSILICONE 360 is free of 2 methylkethyl ketone oximes (MEKO) and methylisobuthyl ketone oximes (MIBKO) and is characterised by improved smell. Abrasion-resistant window glazing, especially for windows with glazing bars, connection and expansion joints, concrete, plaster, masonry, metals, tensionfree plastics and painted/varnished timber.

EGOSILICONE 360 transparent fulfills the requirements according to EMICODE EC 1 PLUS.

https://www.ego.de/produkt/egosilicon360







Environmental Quality (ENV) Criteria Product Verification ENV 11/2.1 Life cycle assessment (Updated on: 26.01.2017) EPD available: Yes ENV 12 Local environmental impact (Updated on: 08.06.2017) Quality level 4 of 4 Legend: yes = Product contributes toward satisfying the credit, N/A = Product not relevant in the credit, no = Credit requirements are not proven

Summary

The product contributes to the certification:

- The product has an Environmental Product Declaration (EPD) which can be used to calculate the building life cycle assessment: EPD available: Yes
- Achieved quality level in DGNB Criteria ENV 1.2 Local environmental impact for the entire product: Quality level 4 of 4



Ecolabels & Product-Assessments

AgBB tested

EPD Institut Bauen und Umwelt e.V.

French VOC-Label A+

ISO 14001 - Environmental Management System









ISO 9001 - Quality Management System

SCAQMD 1168





Product Properties

Ingredients:

Percentage of the product's composition, that is known to 100 wt% the chemical ingredient level SVHC according REACH < 0,1 %: Yes Recycled content post-consumer: N/A N/A Recycled content pre-consumer: Free (< 0,1 %) of polybrominated diphenyl ethers (= Yes PBDE): Free (< 0,1 %) of chlorinated paraffins (= CP inkl. SCCP, Yes MCCP, LCCP): Free (< 0,1 %) of biocidal: No VOC content according 2004/42/EG: o g/l Content of solvents: 0 % Free (< 0,1 %) of hydrocarbon (KWS) plasticizer: Yes Content of VOC: 0 % To what level of detail is the product composition known? 100 ppm VOC content according 2004/42/EG: o g/m2 Rapidly renewable content N/A Non renewable virgin raw material content N/A Free (< 0,1 %) of polybrominated biphenyls (= PBB): Yes Free (< 0,1 %) of hexabromocyclododecane (= HBCD): Yes Free (< 0,1 %) of tris (2-carboxyethyl) phosphine (= TCEP): Yes



Free (< 0,1 %) of lead:	Yes
Free (< 0,1 %) of cadmium:	Yes
Free (< 0,1 %) of chromium-VI compounds:	Yes
Free of solvent according to VdL-RL01:	Yes
Free (< 0,1 %) of aromatic compounds:	Yes
Free (< 0,1 %) from halogenated propellants:	Yes
Free (< 0,1 %) of tin:	Yes
Free (< 0,1 %) of halogenated flame retardants:	Yes
Free (< 0,1 %) of halogens:	Yes
Free of plasticizer according to VdL-RL01:	Yes

Manufacturer:

Environmental Management System according ISO 14001: Yes

Are reverse logistics in place for the product? No

Final manufacturing location of the product: latitude 47.490138178497375 ° DDD Final manufacturing location of the product: longitude 11.177818534416659 ° DDD

Emissions:

Formaldehyde emissions after 28 days according DIN EN 0.002 mg/m³ 717-1:

R-Value according to AgBB: N/A

TVOC after 3 days according ISO 16000-3 / AgBB: N/A

TVOC after 28 days according ISO 16000-3 / AgBB: N/A

SVOC after 3 days according ISO 16000-3 / AgBB: N/A

SVOC after 28 days according ISO 16000-3 / AgBB: N/A

Carcinogens 1A and 1B after 28 days according ISO-16000 $\,$ 0.001 mg/m³ / AgBB:

N/A

Carcinogens 1A and 1B after 3 days according ISO-16000

Circularity:

/ AgBB:

Has the product been designed for reuse, refurbishment or remanufacturing?

Is the product designed for a recycling of equal quality?

No Was the product designed for biodegradation?

No Product was designed with cycling in mind.

No Was the product designed for clean incineration?

No





Was the Product designed for emission or direct dispersal?

Was the product specifically designed for clean and rapid No disassembly?

No

Life Cycle Assessment:


Functional use period N/A



System description

The DGNB certification system was founded by the "German Sustainable Building Council" and first appeared on the market in 2008. The DGNB system evaluates buildings holistically on the basis of individual criteria within the categories Ecological Quality, Economic Quality, Sociocultural and Functional Quality, Technical Quality, Process Quality and Location Quality. Different profiles allow the certification of new buildings and existing buildings, as well as of quarters in Germany and Internationally. Buildings can achieve a certification in Bronze, Silver, Gold and Platinum. Up to now, more than 3,500 projects have been awarded by the DGNB (as of June 2018).

Source: www.dgnb.de

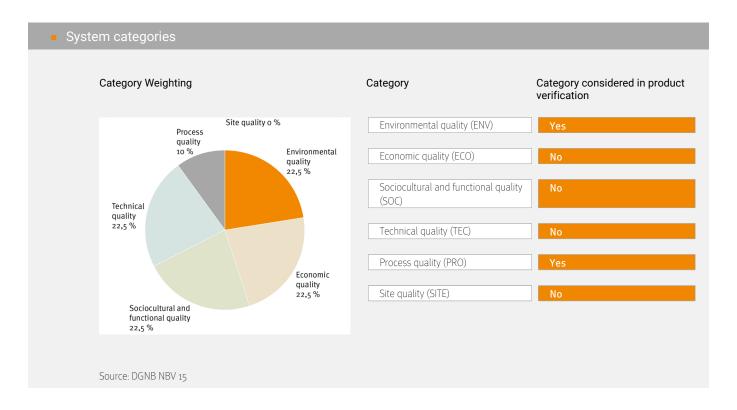



Detailed Verification

Self declared according to DGNB NBV 2015

Environmental Quality (ENV)

ENV 1.1/2.1 Life cycle assessment (Updated on: 26.01.2017)

The product has an Environmental Product Declaration (EPD) which can be used to calculate the building life cycle assessment:

EGOSILICON 360 EPD available: Yes An environmental product declaration exists for the product: EGOSILICON 360 Yes EPD Owner of the Declaration: DBC, EFCC, FEICA, IVK EGOSILICON 360 EPD Publisher: EGOSILICON 360 Institut Bauen und Umwelt e.V. (IBU) EPD Programme holder: EGOSILICON 360 Institut Bauen und Umwelt e.V. (IBU) EPD Declaration number: EPD-DBC-20220180-IBF1-EN EGOSILICON 360 EPD Issue date: EGOSILICON 360 31.08.2022

ENV 1.2 Local environmental impact (Updated on: 08.06.2017

Achieved quality level in DGNB Criteria ENV 1.2 Local environmental impact for the entire product:

EGOSILICON 360 Quality level 4 of 4

Achieved quality level in DGNB Criterion ENV 1.2 Local environmental impact:

EGOSILICON 360 Quality level 4

30.08.2027

EPD valid to:

EGOSILICON 360



EGOSILICON 360

Row 12: Adhesions of mechanically stressed joints over small areas; the areas glass construction, façade and fire protection are not considered here. Sealing compounds, sealing substances, adhesives for dot like and linear adhesions of components in the interior area. Acrylate sealing substances/adhesives and silicone sealing substances are what is meant here.

Quality level 4

Achieved quality level in DGNB ENV 1.2 Row 12 for the entire product:

	Quality level 4
Adhesives and sealants (acrylate, silicone, SMP) 12):	- interior and technical building equipments (DGNB ENV1.2 R
EGOSILICON 360	Yes
Free of chlorinated paraffins (CP):	
EGOSILICON 360	Yes
Content of solvent < 1 %:	
EGOSILICON 360	Yes
Content of solvents:	
EGOSILICON 360	0 %
Free (< 0,1 %) of KWS plasticizers:	
EGOSILICON 360	Yes
Adhesive for the production of airtightness on the similar.	facade inside and outside: e.g. PU, PU hybrid, MS polymer, SN
·	
EGOSILICON 360	For the entire product: Quality level 4
EGOSILICON 360 Achieved quality level in DGNB ENV 1.2 Row 13:	Quality level 4
EGOSILICON 360	
EGOSILICON 360 Achieved quality level in DGNB ENV 1.2 Row 13: EGOSILICON 360 Adhesives and sealants (PU, PU hybrid, MS polyn	Quality level 4
EGOSILICON 360 Achieved quality level in DGNB ENV 1.2 Row 13: EGOSILICON 360 Adhesives and sealants (PU, PU hybrid, MS polyn	Quality level 4 Quality level 4
EGOSILICON 360 Achieved quality level in DGNB ENV 1.2 Row 13: EGOSILICON 360 Adhesives and sealants (PU, PU hybrid, MS polyr (DGNB ENV1.2 Row 13): EGOSILICON 360	Quality level 4 Quality level 4 mer, SMP or the like) - on the façade, windows and external do
EGOSILICON 360 Achieved quality level in DGNB ENV 1.2 Row 13: EGOSILICON 360 Adhesives and sealants (PU, PU hybrid, MS polyr (DGNB ENV1.2 Row 13): EGOSILICON 360	Quality level 4 Quality level 4 mer, SMP or the like) - on the façade, windows and external do
Achieved quality level in DGNB ENV 1.2 Row 13: EGOSILICON 360 Adhesives and sealants (PU, PU hybrid, MS polyr (DGNB ENV1.2 Row 13): EGOSILICON 360 Content of VOC < 1 %:	Quality level 4 Quality level 4 mer, SMP or the like) - on the façade, windows and exte

0 %

EGOSILICON 360



Certified with EMICODE EC1/EC1PLUS, EC1-R/EC1PLUS-R:

EGOSILICON 360	No
Certified EMICODE standard:	
EGOSILICON 360	no entry



Contact Details Manufacturer

EGO Dichtstoffwerke GmbH & Co. Betriebs KG

Kaltenbrunn 27 82467 Garmisch-Partenkirchen DE



Disclaimer

This verification is the evaluation and ranking of products in terms of the certification system DGNB 2015 (New construction of office buildings). The DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen) generally does not certify products. Therefore the project team or the manufacturer is responsible to declare compliance with respect to the DGNB criteria. Notice: This verification is generated by the Assessment Service of BMS. The distribution or publication by third parties is not permitted. The data sheet is not a DGNB certification document. The information is based on the manufacturer's specifications. Despite a diligent treatment of all information BMS can not make any warranties about the completeness, reliability and accuracy of this information. The requirements of DGNB can be interpreted differently and depend on the project and scope of application. Therefore, BMS cannot accept any liability for the evaluation in terms of the DGNB criteria. The user of the data sheet, the user / purchaser of the product and the consultant / planner, who is advising on this product has the duty to check the product for the intended application at their own responsibility. When a new version of this product verification is produced, the previous version loses its validity.